


FUSIBLES DE BAJA TENSIÓN

• Fusibles tipo DO

- Tensión nominal: 400V
- Poder de corte: 50KA
- Curva tipo gG
- Según norma IEC 60269-3

Artículo	Código	EAN 13	Emb.
D01 4A 400V	901100500	-	10
D01 6A 400V	901100501	-	10
D01 10A 400V	901100502	-	10
D01 16A 400V	901100503	-	10
D02 20A 400V	901100504	-	10
D02 25A 400V	901100505	-	10
D02 35A 400V	901100506	-	10
D02 50A 400V	901100507	-	10
D02 63A 400V	901100508	-	10
D03 80A 400V	901100509	-	10
D03 100A 400V	901100510	-	10

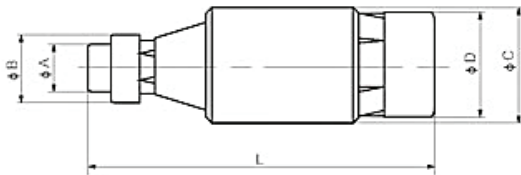

Tamaño	Tensión nominal (V)	Corriente nominal (V)	Peso (g)	Dimensiones				
				Ø A	Ø B	Ø C	Ø D	L
D01	400	2-6	12.7	5	7.3	10.6	10	36
		10		5	8.5	10.6	10	36
		16		5	9.7	10.6	10	36
D02	400	20	13.8	8.5	11	15	14	36
		25		8.5	12	15	14	36
		35		8.5	13.3	15	14	36
		50		8.5	14.5	15	14	36
		63		8.5	16	15	14	36
D03	400	80	15.6	17	22	22	21	43
		100		17	25	22	21	43

